

Table of Contents

Specifications.....	1
Applications.....	2
Your Water Heater Controller at a Glance.....	3
Changing the "OFF-PEAK" time period.....	4
Setting time of day (with or without glass cover in place).....	4
Mounting Instructions.....	5


1. Specifications

Installation.....	Double insulated with appliance terminal	≥ loop-through earth terminal
Rating.....	13A, for immersion heaters up to 3 kW	
Supply.....	230 VAC 50 Hz	
Boost.....	Adjustable between 15 and 120 minutes	
Fitting.....	Surface or flush mounted	
Running reserve.....	72 hours minimum	
Dimensions H x W x D (mm).....	86 x 155 x 55 (mm)	
Ambient temperature.....	-10 °C ... +35 °C	
Protection category.....	IP 20	


2. Applications

The unit is a Water Heater Controller that controls the use of cheap-rate electricity during the night to heat the water in your tank for the following applications:


SINGLE IMMERSION HEATER

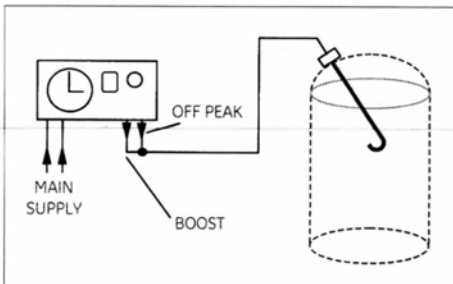


DUAL IMMERSION HEATER

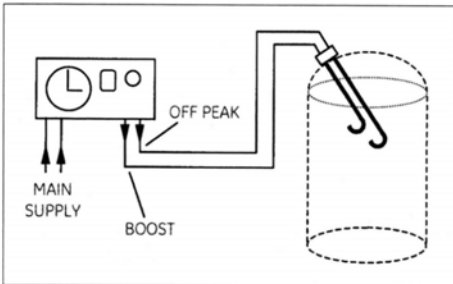

TWO IMMERSION HEATERS

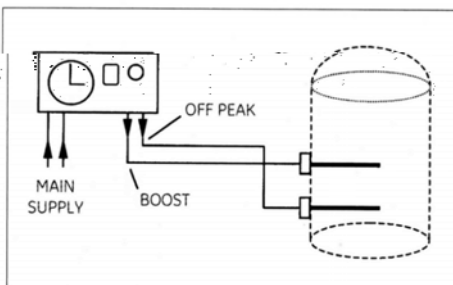

3.1 Your Heater Controller at a Glance

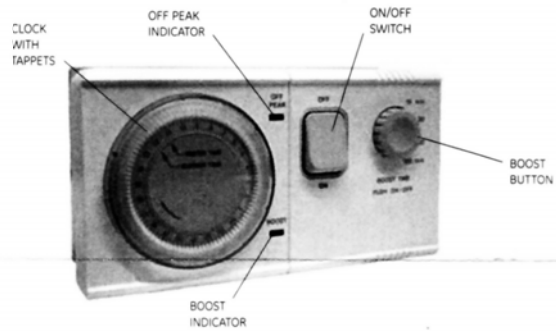

OFF PEAK INDICATOR

The indicator glows if the cheaper night-rate electricity is used.

BOOST INDICATOR

The indicator glows if a boost timer is used.

ON/OFF SWITCH

Switch is in "OFF position"

- The settings of the "OFF PEAK" and "BOOST" time period are not activated, the clock runs but the heater is disconnected.

Switch is in "ON position"

- The settings of the "OFF PEAK" and "BOOST" time periods are activated and the water will be heated during the "OFF-PEAK" time period at night-time.

BOOST BUTTON


This button is only needed if you need extra hot water during the day-time "PEAK" time.

- Press the "BOOST BUTTON" once for switching ON.
- If you want to interrupt the boost function before the boost time is completed: Press the "BOOST BUTTON" once more.



4. Changing the "OFF-PEAK" Time Period Setting Time of Day

CHANGING THE "OFF-PEAK" TIME PERIOD

The tappets for the "OFF-PEAK" time period are pre-set at the factory (3.30 a.m. to 7.30 a.m.) However, if a different time period is required, move the tappets for the "OFF-PEAK" time period to the outer position. The minimum switching time is 15 minutes.

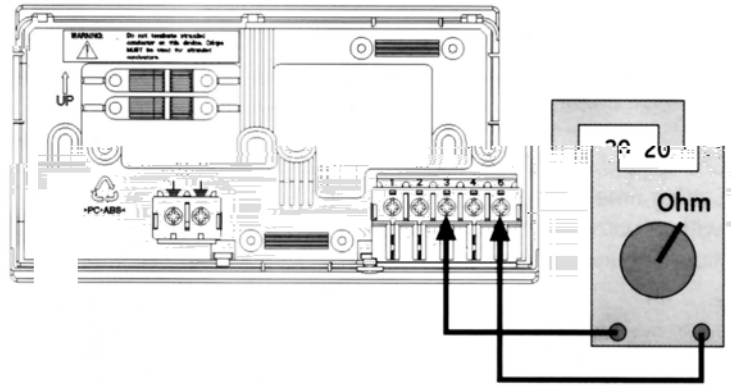


Use the connections 1 to 5 as identified.

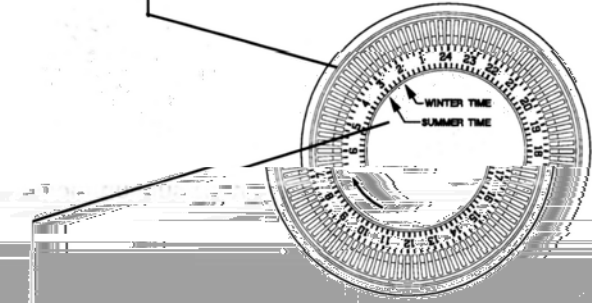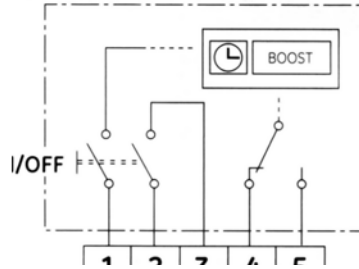

SETTING TIME OF DAY

(with or without glass cover in place)

Rotate the clock (clockwise direction only) until the arrowhead indicating "WINTER TIME" or "SUMMER TIME" aligns with the correct time or day on the dial.

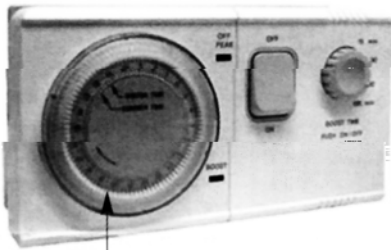

ASSEMBLE THE CLEAR COVER

Once the glass cover is located, it can only be removed

using a screwdriver.

Align the bar on the edge of the cover with the groove at the lower edge of the dial in the housing.


- NB A qualified electrician must carry out the installation and conform to the current IEE regulations.
- NB The unit should be installed on a separate distribution circuit with appropriate overload protection
- NB The Water Heater Controller is suitable for fixed wiring only. Wire size should be 1.5 mm² to 4 mm².



WARNING:

Do not terminate stranded conductor on this device. Crimps MUST be used for stranded conductors.

Wrong

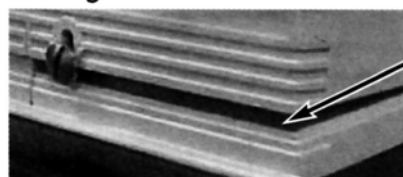

Wrong red line showing

- Assemble the clock by aligning the location pins on the top of the back-plate with the cut-outs provided on the clock body. Lock in position using fixing screw.