

ASPIRANTE

TENERO
Monobasin mixer

**Installation and
operation
Instructions**



INSTALLERS PLEASE NOTE THESE INSTRUCTIONS ARE TO LEFT WITH THE USER

INSTALLATION

WARNING!

The mixer must not be positioned where it will be subjected to freezing conditions.

DO NOT use jointing compounds on any pipe fittings for the installation.

FITTING THE MIXER TAP

Screw the stud into the hole in the base of the mixer unit and secure. Fit the steel braided hoses into the hot and cold inlets (**fig.2**) and tighten to secure.

Place the chrome collar onto the recessed opening on the monobasin. Feed the braided hoses through the collar and opening in the monobasin and place the mixer assembly in place. Make sure the mixer and collar sit correctly on the monobasin.

Slide the rubber seal and horseshoe plate over the stud and secure the mixer assembly in place using the nut provided (**fig.3**).

Note: DO NOT overtighten the nut as this may damage the mixer unit and monobasin.

Fitting the waste unit





Take the waste assembly apart, as shown in **fig.4**.





Insert the control lever through the opening in the side of the lower waste outlet. Fit the retaining nut and tighten. Finger tight should be sufficient.

Slide the silicon seal onto the upper waste outlet and fit the lower silicon seal onto the lip on the lower waste outlet (**fig.5**). Place the upper waste fitting into the drainage hole in the monobasin. Screw the lower waste outlet into the upper waste outlet — DO NOT tighten at this stage.

Align the lower fitting such that the control arm faces towards the rear of the basin and secure.

Slide the top half of the plunger control rod through the opening in the rear of the mixer

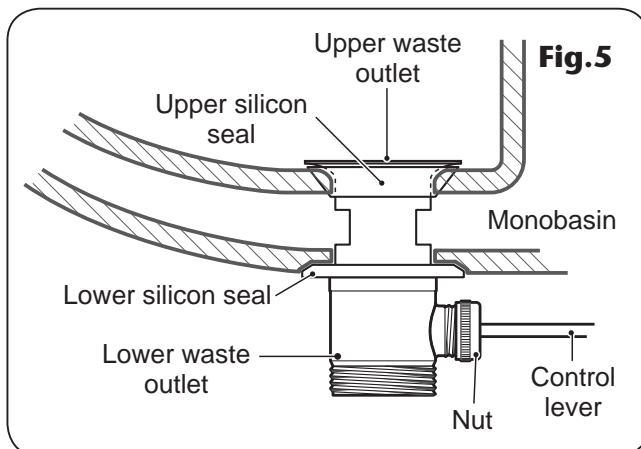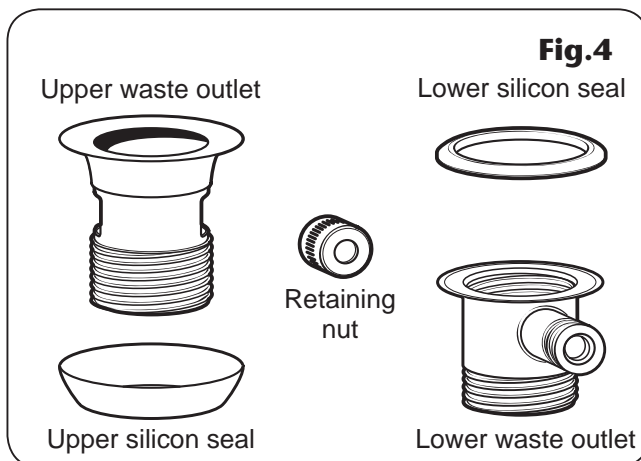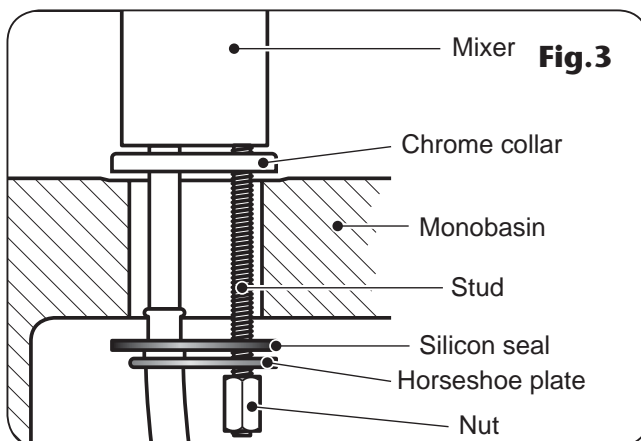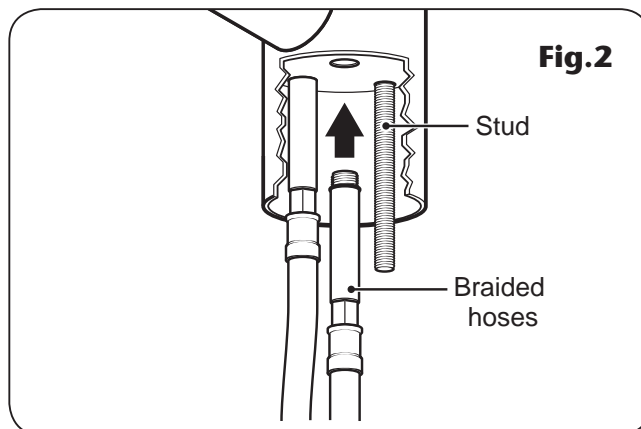

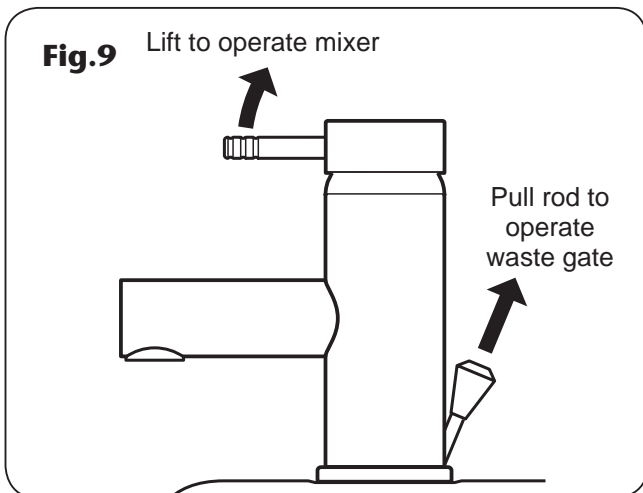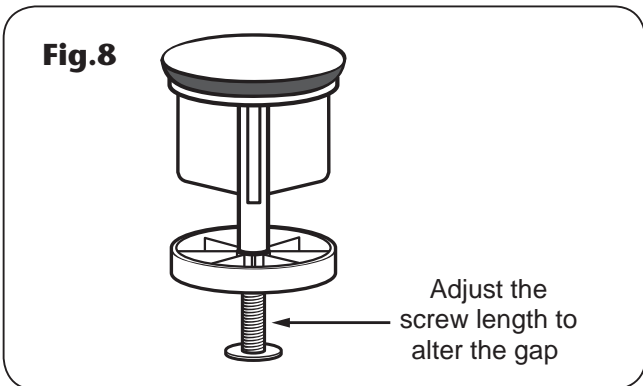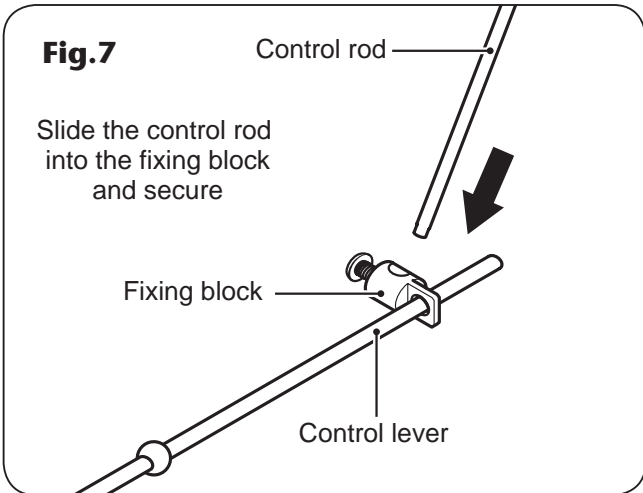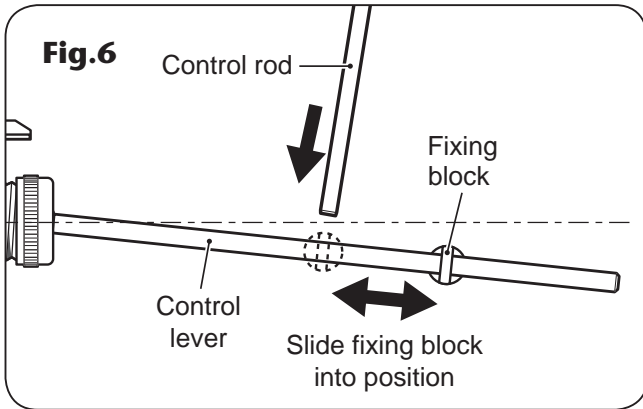

unit. From the underside of the basin, screw the lower section of the control rod into the top rod and tighten.

Push the control lever down and then slide the fixing block onto the control lever. The fixing block is designed to move along the lever to allow for correct positioning (**fig.6**).

Slide the fixing block so that the control rod can fit through the block (**fig.7**). Tighten the screw to secure the plunger control rod.

Place the plunger in the waste assembly. To alter the plunger gap, remove the plunger and adjust the length of the screw in the plunger base (**fig.8**).

FINISHING THE INSTALLATION

IMPORTANT: Before completing the connection of the water supply to the inlets of the mixer, flush out the system to remove any debris in the pipework. This can be done by connecting a hose to the pipework and turning on the mains water supply long enough to clear the debris to waste.

Connect the steel braided hoses to the hot and cold supplies using standard 1/2" BSP tap connectors.

Connect the waste outlet to standard 1 1/4" waste trap.

OPERATION

The mixer has a single handwheel control for flow and temperature.

To turn the tap on, tilt the control lever upwards (**fig.9**). To stop the flow push the control lever down. Adjust the temperature by turning the control lever left or right.

To close the waste gate pull the control rod at the rear of the unit upwards (**fig.9**). This will drop the plunger into the outlet. To open the waste gate push the rod down.

CLEANING

IMPORTANT: Do not use abrasive or solvent cleaning fluids. The mixer unit should be cleaned using a soft cloth and warm water. Any stains should be removed using washing up liquid.

SPARE PARTS

<i>Description</i>	<i>Part No.</i>
40mm ceramic cartridge	83308110
Complete handwheel	83308130
Complete anti-splash tap	83308070



*A **MORCROS** Company*

Service Policy

In the event of a complaint occurring, the following procedure should be followed:

1 Telephone Customer Service on +44 (0) 24 7637 2222 (+44 (0) 84 5762 6591 in Scotland and in Northern Ireland), having available the model number and power rating of the product, together with the date of purchase.

2 Triton Customer Service will be able to confirm whether the fault can be rectified by either the provision of a replacement part or a site visit from a qualified Triton service engineer.

3 If a service call is required it will be booked and the date of call confirmed. In order to speed up your request, please have your postcode available when booking a service call.

4 It is essential that you or an appointed representative (who must be a person of 18 years of age or more) is present during the service engineer's visit and receipt of purchase is shown.

5 A charge will be made in the event of an aborted service call by you but not by us, or where a call under the terms of guarantee has been booked and the failure is not product related (i.e. scaling and furring, incorrect water pressure, pressure relief device operation, electrical installation faults).

6 If the product is no longer covered by the guarantee, a charge will be made for the site visit and for any parts supplied.

7 Service charges are based on the account being settled when work is complete, the engineer will then request payment for the invoice. If this is not made to the service engineer or settled within ten working days, an administration charge will be added.

Replacement Parts Policy

Availability: It is the policy of Triton to maintain availability of parts for the current range of products for supply after the guarantee has expired. Stocks of spare parts will be maintained for the duration of the product's manufacture and for a period of five years thereafter.

In the event of a spare part not being available a substitute part will be supplied.

Payment: The following payment methods can be used to obtain spare parts:

1 By post, pre-payment of pro forma invoice by cheque or money order.

2 By telephone, quoting credit card (MasterCard or Visa) details.

3 By website order, www.tritonshowers.co.uk

Triton Plc
Triton Road
Nuneaton
Warwickshire

CV11 4NR

TRITON STANDARD GUARANTEE

Triton Plc guarantee this product against all mechanical defects arising from faulty workmanship or materials for a period of five years for domestic use only, from the date of purchase, provided that it has been installed by a competent person in full accordance with the fitting instructions.

Any part found to be defective during this guarantee period we undertake to repair or replace at our option without charge so long as it has been properly maintained and operated in accordance with the operating instructions, and has not been subject to misuse or damage. This product must not be taken apart, modified or repaired except by a person authorised by Triton Plc. This guarantee applies only to products installed within the United Kingdom and does not apply to products used commercially. This guarantee does not affect your statutory rights.

What is not covered:

1 Breakdown due to: *a*) use other than domestic use by you or your resident family; *b*) wilful act or neglect; *c*) any malfunction resulting from the incorrect use or quality of water or incorrect setting of controls; *d*) faulty installation.

2 Repair costs for damage caused by foreign objects or substances.

3 Total loss of the product due to non-availability of parts.

4 Compensation for loss of use of the product or consequential loss of any kind.

5 Call out charges where no fault has been found with the appliance.

6 The cost of repair or replacement of pressure relief devices, sprayheads, hoses, riser rails and/or wall bracket or any other accessories installed at the same time.

7 The cost of routine maintenance, adjustments, overhaul modifications or loss or damage arising therefrom, including the cost of repairing damage, breakdown, malfunction caused by corrosion, furring, pipe scaling, limescale, system debris or frost.

Customer Service: ☎ +44 (0) 24 7637 2222

Scottish and Northern Ireland

Customer Service: ☎ +44 (0) 84 5762 6591

Trade Installer Hotline: ☎ +44 (0) 24 7632 5491

Fax: +44 (0) 24 7632 4564

www.tritonshowers.co.uk

E mail: technical@triton.plc.uk