



## **KFLM02CND-FRS**

2w LED Filament Candle, 20000hrs, Frosted



## **Product Overview**

Kosnic's Home range of LED products brings the energy saving and safety capabilities of LED technology for general and decorative lighting to the home. Offering a range of classic shapes, all Home LEDs are designed to replace traditional filament lamps. Our showpiece KTC LED Frosted Filament Candle lamp has a traditional appearance and gives an even spread of light in all directions. It is also highly functional and efficient, giving a quality of light that creates inviting living spaces while offering huge energy savings over filament lamps without compromising on brightness. Delivering a warm and comforting ambient light around 360 degrees, this LED filament candle is a perfect match for almost every style of chandelier across domestic and professional environments, and once in place rapid payback is achieved.

# Features

Save energy up to 90% compared with a filament lamp.

Linear LED filament provides a traditional appearance.

Popular B22, E14 and E27 caps.

Even light distribution.

High lumen output.

Long life of 20,000hrs.

Instant start.

Negligible UV output.

Mercury free.

# Specifications

	KFLM02CND/B22-FRO-N27	KFLM02CND/E14-FRO-N27	KFLM02CND/E27-FRO-N27
<b>Fitting</b>	B22	E14	E27
<b>Shape / Type</b>	Candle	Candle	Candle
<b>Optics Type</b>	Frosted	Frosted	Frosted
<b>Wattage (w)</b>	2	2	2
<b>Equivalent Wattage (w)</b>	19	19	19
<b>Total Lumens (lm)</b>	180	180	180
<b>Input Current (mA)</b>	16	16	16
<b>Input Voltage</b>	220-240Vac	220-240Vac	220-240Vac
<b>CCT Temperature (k)</b>	2700	2700	2700
<b>CCT Name</b>	Warm White	Warm White	Warm White
<b>Rated Life (hrs)</b>	20000	20000	20000
<b>Switch Cycles</b>	50000	50000	50000
<b>Peak Candelas (cd)</b>	30	30	30
<b>CRI</b>	80	80	80
<b>Dimmable</b>	No	No	No
<b>Retrofit</b>	Yes	Yes	Yes
<b>Power Factor</b>	0.55	0.55	0.55
<b>Start Time (s)</b>	0.10	0.10	0.10
<b>Warm-up Time (s)</b>	0.5	0.5	0.5
<b>Length (mm)</b>	90	98	91
<b>Width (mm)</b>	35	35	35
<b>Depth (mm)</b>	35	35	35
<b>Ambient Temperature (°C)</b>	-20 to 40	-20 to 40	-20 to 40

Unit D2 Kennetside, Bone Lane  
NEWBURY, BERKSHIRE

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>


## Energy Label

	KFLM02CND/B22-FRO-N27	KFLM02CND/E14-FRO-N27	KFLM02CND/E27-FRO-N27
Energy Class	A++	A++	A++
Energy Consumption (kWh/1000h)	2	2	2


## Packaging

	KFLM02CND/B22-FRO-N27	KFLM02CND/E14-FRO-N27	KFLM02CND/E27-FRO-N27
UPC Code	0609207989578	0609207989585	0609207989592
Outer Box Length (mm)	455	455	455
Outer Box Width (mm)	220	220	220
Outer Box Height (mm)	155	155	155
Volume	0.0155155	0.0155155	0.0155155
Box Quantity	50	50	50
Outer Box Weight (kg)	2.2	2.2	2.2


KFLM02CND/B22-FRO-N27

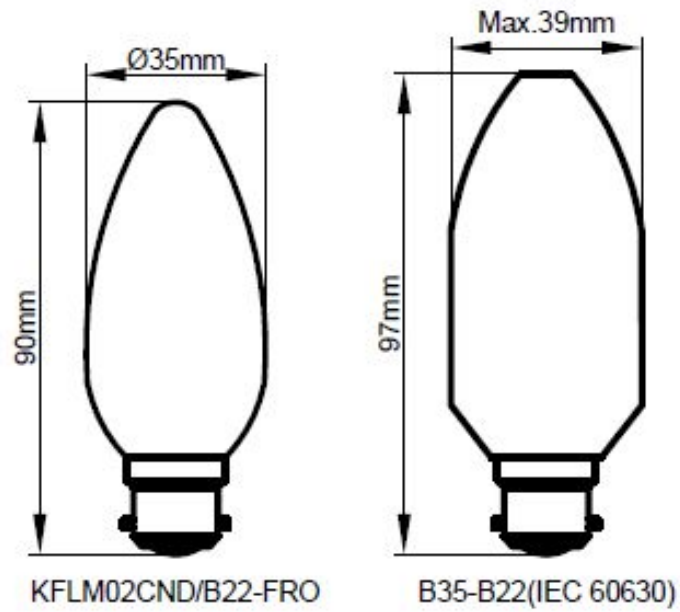


KFLM02CND/E14-FRO-N27

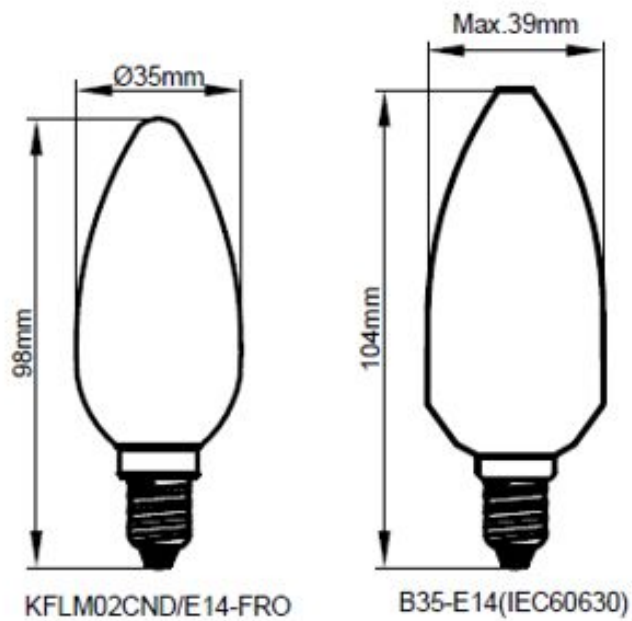

KFLM02CND/E27-FRO-N27

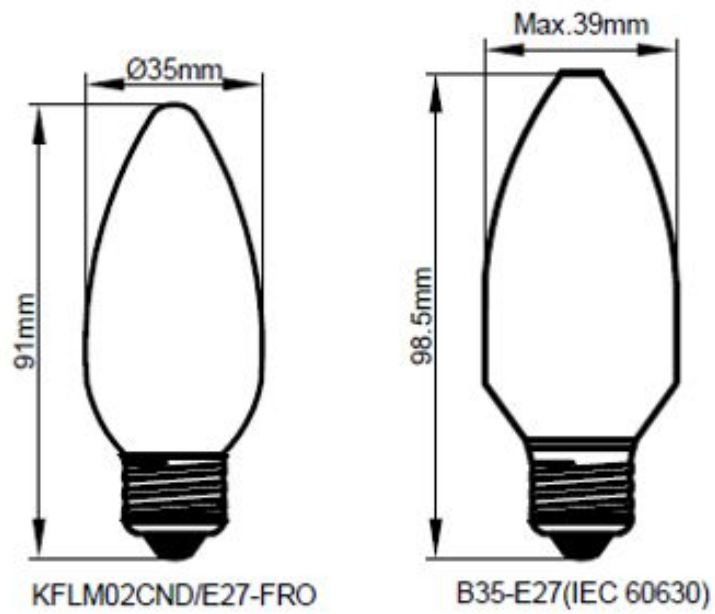

KFLM02CND/B22-FRO-N27  
KFLM02CND/E14-FRO-N27  
KFLM02CND/E27-FRO-N27

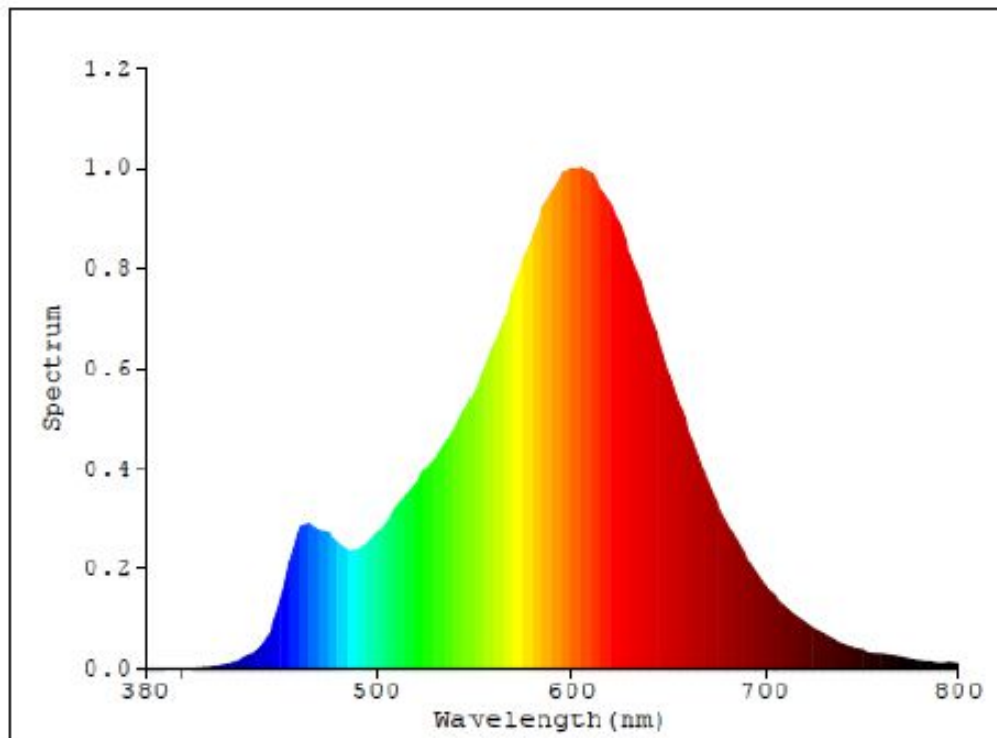

Datasheet generated from <http://www.electrika.com> last updated Friday, November 17, 2017 3:10:19 PM