



## **RLCND06**

6w Reon LED Candle, Frosted, 20000hrs



## **Product Overview**

The Reon range from Kosnic is a selected line of 20,000 hour energy saving retrofit LED lamps. Reliable, affordable and easy to install, Reon LEDs surpass the high quality standards that home owners and lighting professionals demand for lower cost applications. The Reon LED Frosted Candle lamp is the perfect energy efficient and high quality solution to directly replace traditional halogen lamps. Compatible with existing halogen fittings, this product will save you up to 85% of the energy needed to power its traditional equivalent without compromising on brightness.

# Features

Save energy up to 85% compared with filament lamp.

Direct replacement of B22, E14 or E27 lamp.

High lumen output.

Long life of 20,000hrs.

Instant start.

No UV output.

Mercury free.

# Specifications

	RLCND06B22-30-N	RLCND06E14-30-N	RLCND06E27-30-N
<b>Fitting</b>	B22	E14	E27
<b>Shape / Type</b>	Candle	Candle	Candle
<b>Colour Finish</b>	White	White	White
<b>Optics Type</b>	Frosted	Frosted	Frosted
<b>Wattage (w)</b>	6	6	6
<b>Equivalent Wattage (w)</b>	41	41	41
<b>Total Lumens (lm)</b>	490	490	490
<b>Input Current (mA)</b>	46	46	46
<b>Input Voltage</b>	220-240Vac	220-240Vac	220-240Vac
<b>CCT Temperature (k)</b>	3000	3000	3000
<b>CCT Name</b>	Warm White	Warm White	Warm White
<b>Rated Life (hrs)</b>	20000	20000	20000
<b>Switch Cycles</b>	50000	50000	50000
<b>CRI</b>	81	81	81
<b>Dimmable?</b>	No	No	No
<b>Retrofit?</b>	Yes	Yes	Yes
<b>Power Factor</b>	0.57	0.57	0.57
<b>Start Time (s)</b>	0.45	0.45	0.45
<b>Warm-up Time (s)</b>	0.5	0.5	0.5
<b>Length (mm)</b>	99	102	100
<b>Width (mm)</b>	37	37	37
<b>Depth (mm)</b>	37	37	37
<b>Ambient Temperature (°C)</b>	-20 to 40	-20 to 40	-20 to 40


## Energy Label

	RLCND06B22-30-N	RLCND06E14-30-N	RLCND06E27-30-N
Energy Class	A+	A+	A+
Energy Consumption (kWh/1000h)	6	6	6


## Packaging

	RLCND06B22-30-N	RLCND06E14-30-N	RLCND06E27-30-N
UPC Code	0609207992202	0609207992219	0609207992226
Outer Box Length (mm)	455	455	455
Outer Box Width (mm)	220	220	220
Outer Box Height (mm)	155	155	155
Volume	0.0155155	0.0155155	0.0155155
Box Quantity	50	50	50
Outer Box Weight/kg	2.8	2.8	2.8

RLCND06B22-30-N

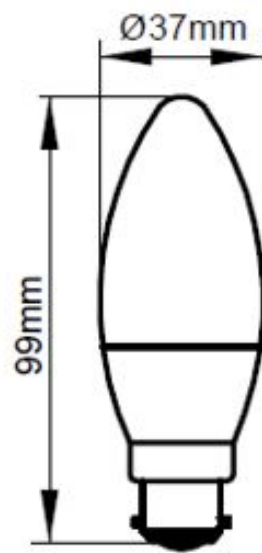


RLCND06B22

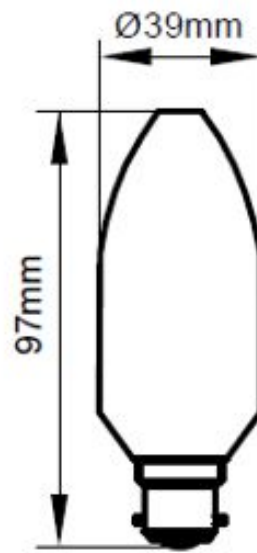


B35-B22(IEC 60630)

RLCND06E14-30-N

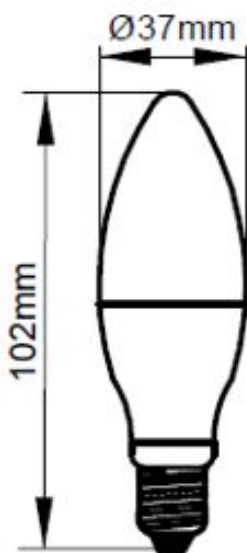


RLCND06E14

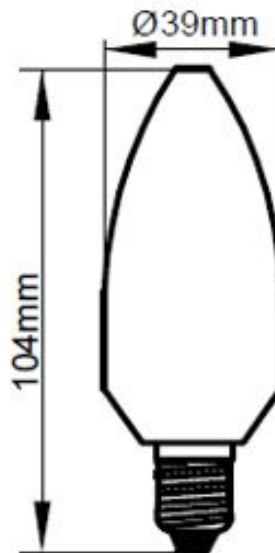


B35-E14(IEC 60630)

RLCND06E27-30-N

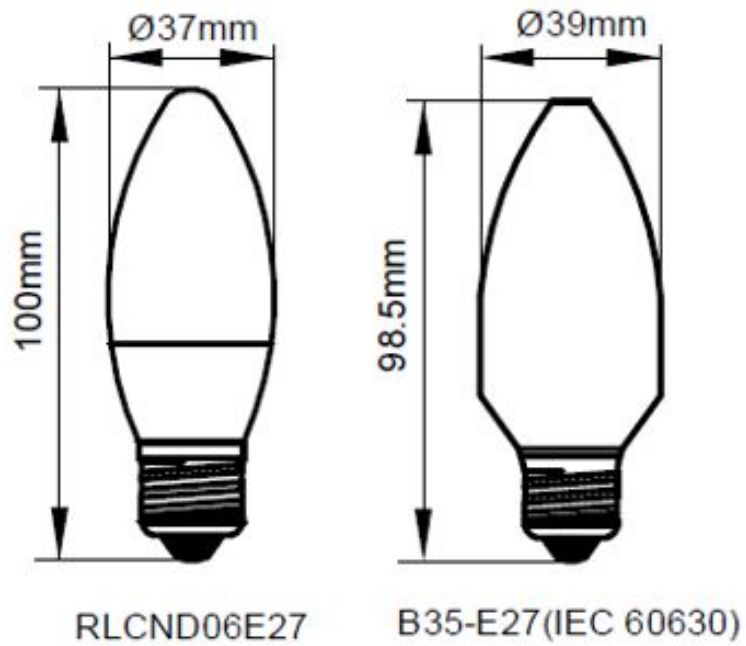

RLCND06B22-30-N  
RLCND06E14-30-N  
RLCND06E27-30-N

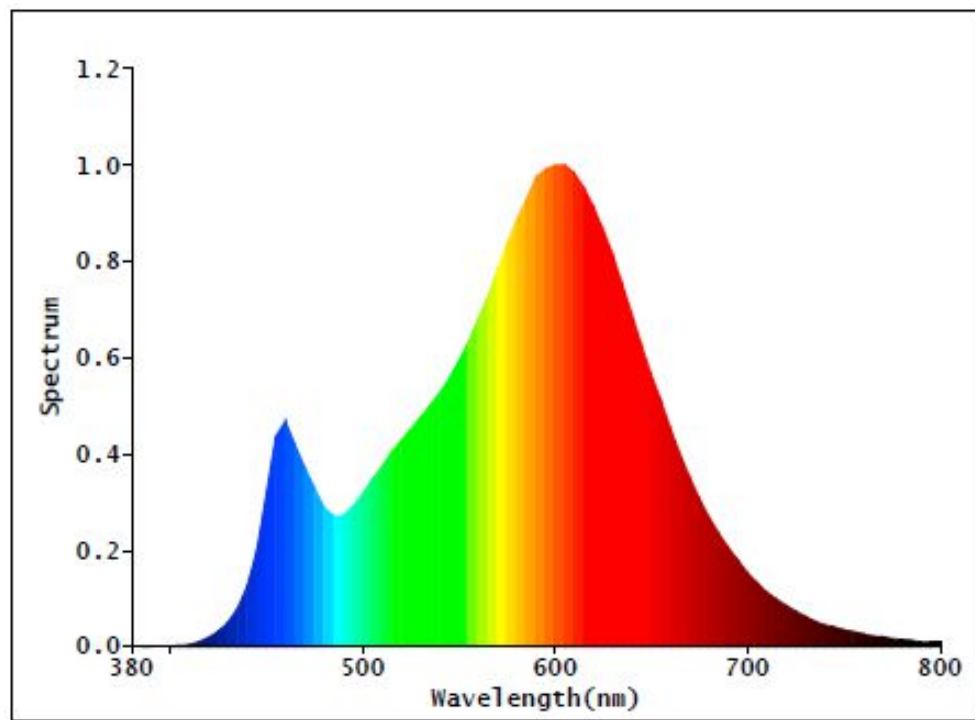

Datasheet generated from <http://www.electrika.com> last updated Friday, August 18, 2017 12:55:36 PM