


TTR Towel Rail Range

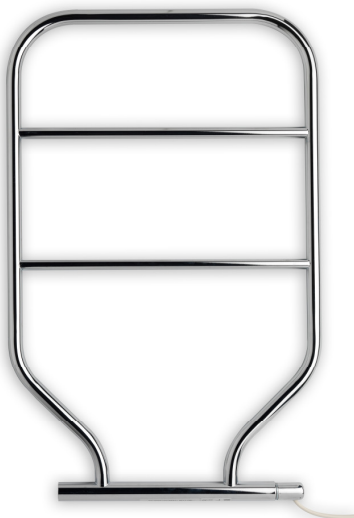

Product Description

Water-glycol filled towel rail available in a range of sizes and finishes.


Key Features

- Range of five models in a variety of sizes and finishes
- Water-glycol filled
- Larger models will help to take the chill off a small bathroom or cloakroom
- Splash-proof (IPX5) for use in bathrooms and other wet areas

Technical Details

Thermal cut out	Built in temperature limiter and overheat protection.
Installation	Wall mounting brackets supplied as standard.
Cable	3 core cable – live, neutral, earth. Cable entry can be at either bottom left or bottom right. Installations must be in accordance with IEE regulations.
Construction	Tubular steel Water-glycol filled
Class	Class I
IP Rating	IPX5
Colour / Finish	White stove enamel or chrome plated
Accessories	Energy Regulator: FSCC—chrome regulator with runback timer FSCW—white regulator with runback timer
Approvals	CE and BEAB
Warranty	2 years

Dimensions

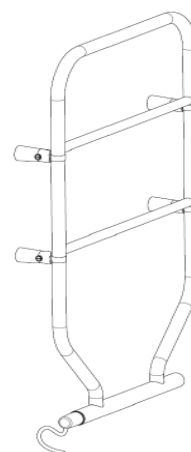

Model No.	Output W	Height (B) mm	Width (A) mm	Colour	Depth (C) mm	Weight kg
TTRC90/W	60	616	533	Chrome	93*	3.4
TTRC130/W	80	851	533	Chrome	93*	4.2
TTRC150/W	100	851	787	Chrome	93*	5.0
TTRS120/W	100	616	533	White	93*	3.3
TTRS175/W	120	851	533	White	93*	4.1

*including wall bracket 93mm.

Packaging Details

Model No.	Length	Height	Depth	Barcode
TTRC90/W	600	670	75	5011139 001146
TTRC130/W	600	910	75	5011139 001153
TTRC150/W	850	910	75	5011139 001177
TTRS120/W	600	670	75	5011139 001214
TTRS175/W	600	910	75	5011139 001221

Additional Information

Model No.	Ti (Tier)	Hi (Height)	Pallet Quantity (2.4m high)
TTRC90/W	25	2	50
TTRC130/W	20	2	40
TTRC150/W	25	1	25
TTRS120/W	50	1	50
TTRS175/W	20	2	40