



ESGN0305R65

Emergency Exit Bulkhead



Product Overview

Kosnic's LED Emergency Exit Bulkhead is a self-contained, robust, multi-purpose, maintained or nonmaintained 3 hour emergency exit sign solution. The fitting is adaptable to be surface mounted, recessed or installed with a tilting bracket. It is supplied with the downward arrow exit sign for wall mounting and can be used without signs as an emergency light. When surface mounted the fitting can make use of a strip of 8 LEDs set in the bottom edge to provide doorway illumination below the sign in emergency mode.

Features

Three hour rated duration

Class II, IP65, IK10

Surface or recessed mounting

Tilting wall bracket option

Flush or hanging exit sign options

Polycarbonate

Ni-CD battery

Mercury free

Specifications

Shape / Type	Bulkhead
Colour Finish	White
Power (W)	6
Input Current (mA)	52
Input Voltage	220-240 Vac 50-60 Hz
CCT Temperature (k)	6500
CCT Name	Day Light
Rated Lifetime (hrs)	30000
Beam Angle (°)	120
Emergency	Yes
Power Factor	0.50
IP Rating	IP65
Class Protection	Class II
IK Rating	IK10
Warm-up Time (s)	Instant full light
Mounting	Surface (recessed and bracket kits available)
Width (mm)	325
Height (mm)	158
Depth (mm)	48
Mercury (mg)	0
LMF at Lifetime	0.75
Ambient Temperature (°C)	-10 to 40
Emergency Conversion Time (seconds)	1
Emergency Operating Time (hours)	3
Battery Code	KBAT1500NC8

Unit D2 Kennetside, Bone Lane
NEWBURY, BERKSHIRE

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>



Battery Voltage (V)	4.8
Battery Capacity (mAh)	1500
Battery Type	Nickel Cadmium
Battery Charging Time (hrs)	12
Battery Life (years)	4
Emergency Operation Test	Manual

Luminous Flux

With flush mounted exit sign	150 (Non-Emergency Mode) / 60 (Emergency Mode)
With hanging exit sign	220 (Non-Emergency Mode) / 90 (Emergency Mode)
Without exit sign	350 (Non-Emergency Mode) / 140 (Emergency Mode)
Bottom edge LED strip	N/A (Non-Emergency Mode) / 30 (Emergency Mode)

Packaging

Outer Box Length (mm)	770
Outer Box Width (mm)	515
Outer Box Height (mm)	375
Volume	0.14870625
Box Quantity	20
Outer Box Weight (kg)	19.5

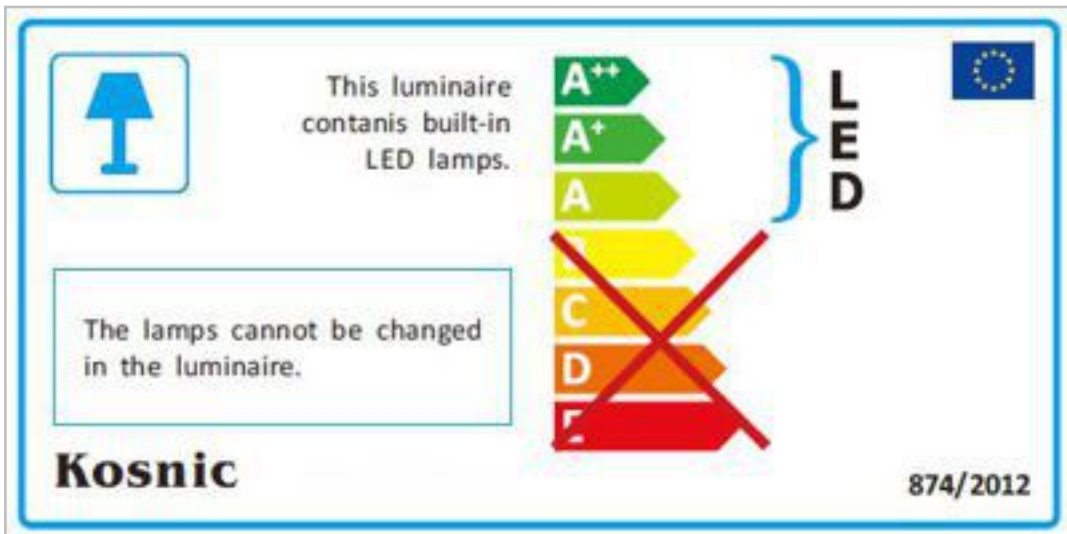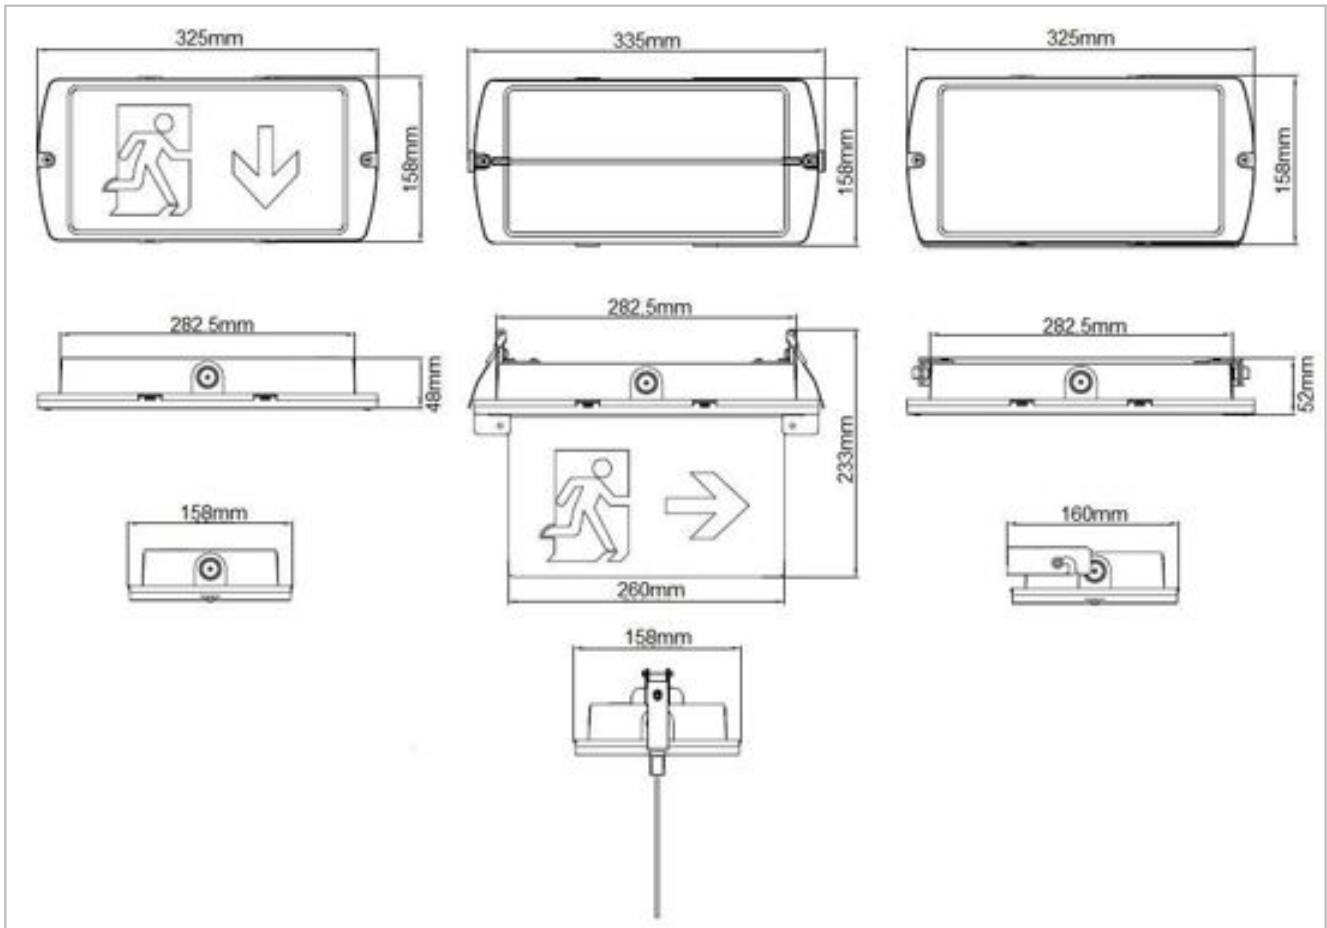

Datasheet generated from <http://www.electrika.com> last updated Monday, November 20, 2017 12:17:17 PM