



## **KFLM07GLS-CLR**

7w LED Filament A55 GLS, 20000hrs, Clear



## **Product Overview**

The KTC LED Filament GLS lamp has a traditional appearance and gives an even spread of light in all directions. It is also highly functional and efficient, up to 100lm/W, giving a quality of light that creates inviting living spaces while offering huge energy savings over filament lamps without compromising on brightness. The lamps can quickly replace filament products in domestic and hospitality lighting applications, and once in place rapid payback is achieved.

## Features

Linear LED filament provides a traditional appearance.

Even light distribution.

Popular B22 and E27 caps.

Save energy up to 90% compared with an incandescent filament lamp.

High lumen output, up to 100lm/W.

Long life of 20,000h.

Instant start.

Negligible UV output.

Mercury free.

## Safety and Maintenance

Switch off supply before installing or removing lamp. Allow to cool before handling.

Do not use in totally enclosed fittings as this will reduce lamp life.

Do not dispose of in household waste.

Dispose of in appropriate section of local civic amenity site or recycling centre.

# Specifications

	KFLM07GLS/B22-CLR-N27	KFLM07GLS/E27-CLR-N27
<b>Fitting</b>	B22	E27
<b>Shape / Type</b>	GLS	GLS
<b>Optics Type</b>	Clear	Clear
<b>Wattage (w)</b>	7	7
<b>Equivalent Wattage (w)</b>	55	55
<b>Total Lumens (lm)</b>	730	730
<b>Input Current (mA)</b>	56	56
<b>Input Voltage</b>	220-240Vac	220-240Vac
<b>CCT Temperature (k)</b>	2700	2700
<b>CCT Name</b>	Warm White	Warm White
<b>Rated Life (hrs)</b>	20000	20000
<b>Nominal Lifetime (hrs)</b>	20000	20000
<b>Switch Cycles</b>	50000	50000
<b>Peak Candelas (cd)</b>	80	80
<b>CRI</b>	80	80
<b>Dimmable</b>	No	No
<b>Retrofit</b>	Yes	Yes
<b>Power Factor</b>	0.54	0.54
<b>Start Time (s)</b>	0.10	0.10
<b>Warm-up Time (s)</b>	Instant full light	Instant full light
<b>Length (mm)</b>	105	105
<b>Width (mm)</b>	60	60
<b>Depth (mm)</b>	60	60
<b>Mercury (mg)</b>	0	0

Unit D2 Kennetside, Bone Lane  
NEWBURY, BERKSHIRE

T: 01635 523 713 E: sales@kosnic.com W: <http://www.kosnic.com>

<b>Clean-up instructions</b>	N/A	N/A
<b>Rated Power (W)</b>	7.00	7.00
<b>Rated Luminous Flux (lm)</b>	730	730
<b>LMF at Lifetime</b>	0.75	0.75
<b>SDCM of CCT</b>	<6	<6
<b>Ambient Temperature (°C)</b>	-20 to 40	-20 to 40

## Product Markings

	KFLM07GLS/B22-CLR-N27	KFLM07GLS/E27-CLR-N27
<b>Manufacturer</b>	Kosnic	Kosnic
<b>Product Code</b>	KFLM07GLS/B22-CLR-N27	KFLM07GLS/E27-CLR-N27
<b>Voltage</b>	220-240Vac 50-60Hz	220-240Vac 50-60Hz
<b>Nominal Power (W)</b>	7	7
<b>Current (mA)</b>	56	56
<b>CE Mark</b>	Yes	Yes
<b>WEEE Mark</b>	Yes	Yes
<b>Batch Code</b>	Yes	Yes


## Energy Label

	KFLM07GLS/B22-CLR-N27	KFLM07GLS/E27-CLR-N27
<b>Manufacturer</b>	Kosnic	Kosnic
<b>Product Code</b>	KFLM07GLS/B22-CLR-N27	KFLM07GLS/E27-CLR-N27
<b>Energy Class</b>	A+	A+
<b>Energy Consumption (kWh/1000h)</b>	7	7


## Packaging

	KFLM07GLS/B22-CLR-N27	KFLM07GLS/E27-CLR-N27
<b>UPC Code</b>	0609207989448	0609207989455
<b>Outer Box Length (mm)</b>	630	630
<b>Outer Box Width (mm)</b>	320	320
<b>Outer Box Height (mm)</b>	150	150
<b>Volume</b>	0.03024	0.03024
<b>Box Quantity</b>	50	50
<b>Outer Box Weight (kg)</b>	3.4	3.4

KFLM07GLS/B22-CLR-N27

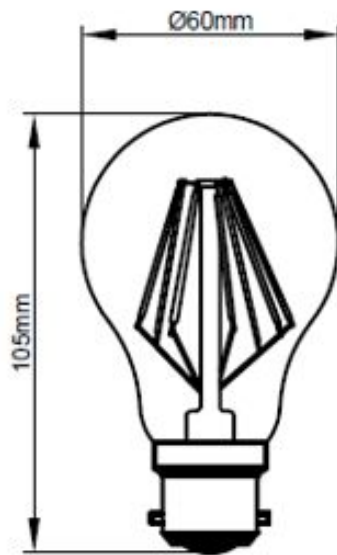


KFLM07GLS/B22-CLR

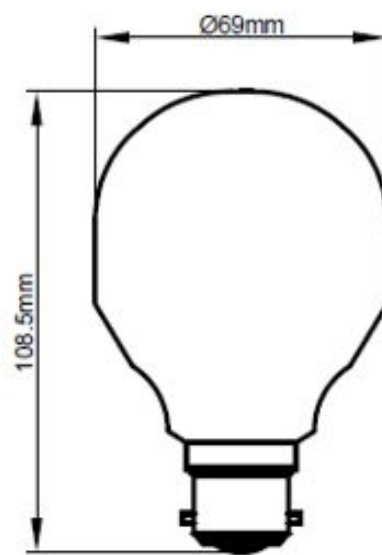


A60-PS60-B22(IEC60630)

KFLM07GLS/E27-CLR-N27

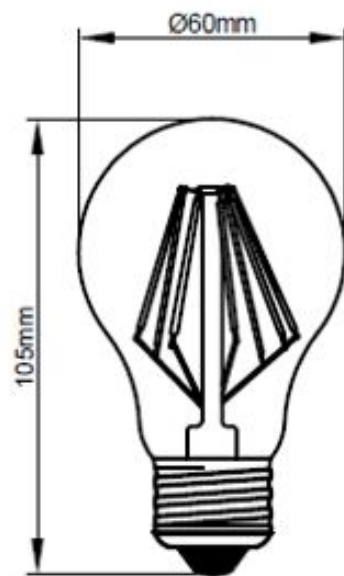


KFLM07GLS/E27-CLR

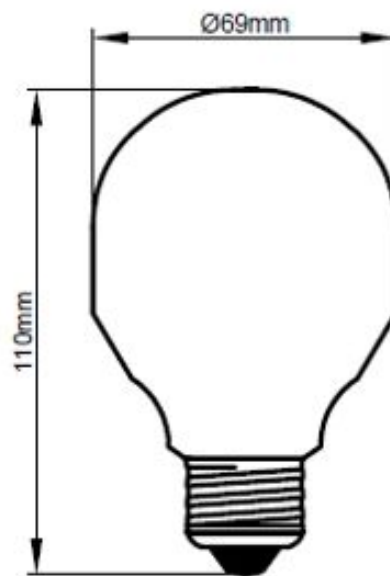

A60-PS60-E27(IEC60630)

KFLM07GLS/B22-CLR-N27  
KFLM07GLS/E27-CLR-N27

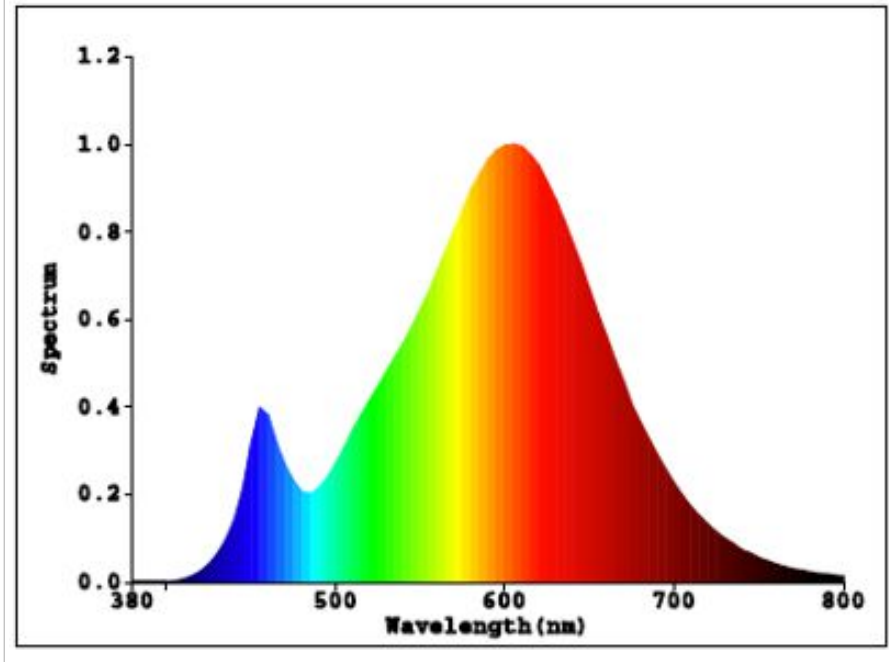

Datasheet generated from <http://www.electrika.com> last updated Friday, November 17, 2017 3:10:19 PM