

ecoDRY

For use in washrooms



KEY FEATURES

- White ABS plastic / satin die cast aluminium
- Air flow 187 m³/hr / 3500 l/min
- Automatic sensor operated
- LED "Blu" down-lighter when in use
- Air speed from 250 Km/h
- ecoDRY 550 Cool air, only 2.3 W per drying cycle
- ecoDRY 1100 Warm air
- Very quick 10 -15 second drying time
- Low noise level from 68 dB(A) at 2m
- Flow air flow outlet - blade / air curtain
- Revolutionary double level anti-bacteria protection system
- Agion[®] Silver Antimicrobial treated
- IP23 rating
- 3 year warranty

550 w - 1100 w Hand Dryers

Airflow are proud to present an Eco-Hygienic Drying System – the ecoDRY has double antibacterial protection as the internal plastic parts are treated with Agion[®] Silver Antimicrobial reducing bacteria on the dryer's surfaces.

ecoDRY offers superior performance in drying time at a very quick 10 – 15 seconds.

ecoDRY 550 cool air unit only consumes 2.3 W per drying cycle hence qualifying for Airflow's ecoair accreditation.

ecoDRY 1100 models have heating elements for those who prefer a conventional warm air drying system.

The product boasts a contemporary design with ergonomic features making it stand out from the competition – a drying system to aspire to for your wash room.



MODELS


White	ABS plastic
Satin	Die cast aluminium



TECHNICAL DATA

Specification	ecoDRY 550 ABS	ecoDRY 550 Satin	ecoDRY 1100 ABS	ecoDRY 1100 Satin
Function	Automatic Sensor	Automatic Sensor	Automatic Sensor	Automatic Sensor
Material	ABS	Die Cast Aluminum	ABS	Die Cast Aluminum
Colour	White	Satin Chrome	White	Satin Chrome
Absorption Heating Element	N/A	N/A	550 W	550 W
Absorption Motor	550 W / 2.3 W per drying cycle	550 W / 2.3 W per drying cycle	550 W	550 W
Total Power	550 W	550 W	1100 W	1100 W
Air Speed	250 km/h	250 km/h	325 km/h	325 km/h
Fan speed	26000 r.p.m.	26000 r.p.m.	30000 r.p.m.	30000 r.p.m.
Air Flow Performance	126 m ³ /hr / 35 l/sec	126 m ³ /hr / 35 l/sec	187 m ³ /hr / 52 l/sec	187 m ³ /hr / 52 l/sec
Drying Time	10 - 15 sec	10 - 15 sec	10 - 15 sec	10 - 15 sec
Noise Level (at 2 m)	68dB(A)	68dB(A)	75dB(A)	75dB(A)
Protection Rating	IP23	IP23	IP23	IP23
Electrical Insulation	Class II	Class II	Class II	Class II
Certification	CE	CE	CE	CE
Weight (Kg)	3.0	5.0	3.0	5.0
Dimensions (H x W x D)mm	285 x 221 x 157	285 x 221 x 157	285 x 221 x 157	285 x 221 x 157
Product Codes	90000242	90000243	90000518	90000519

DIMENSIONS (mm)

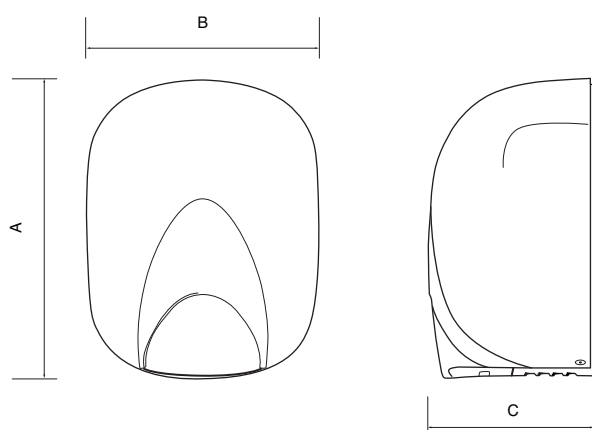

Model	A	B	C
ecoDRY	285	221	157

FLOW MECHANISM



CONSUMABLES / SPARE PARTS

Replacement carbon brushes are available on request from your ecoDRY mini stockist or visit: airflow.com

Call: 01494 560800

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80000191 - Issue4 06/17