

DECORATIVE SECURITY WALL LIGHT

Product Features


- Robust durable IP54 polycarbonate housing
- Multi positionable tilt and rotatable LED heads
- Adjustable PIR with settings



CAT NO.	DRIVER	TYPE	LUMINAIRE LUMENS	WATTAGE
EWLS10B40P	Fixed Output	Single Head	1000	10W
EWLS20B40P	Fixed Output	Twin Head	2000	20W
EWLM10B40P	Fixed Output	Single Head Mini	800	10W




Product Drawings

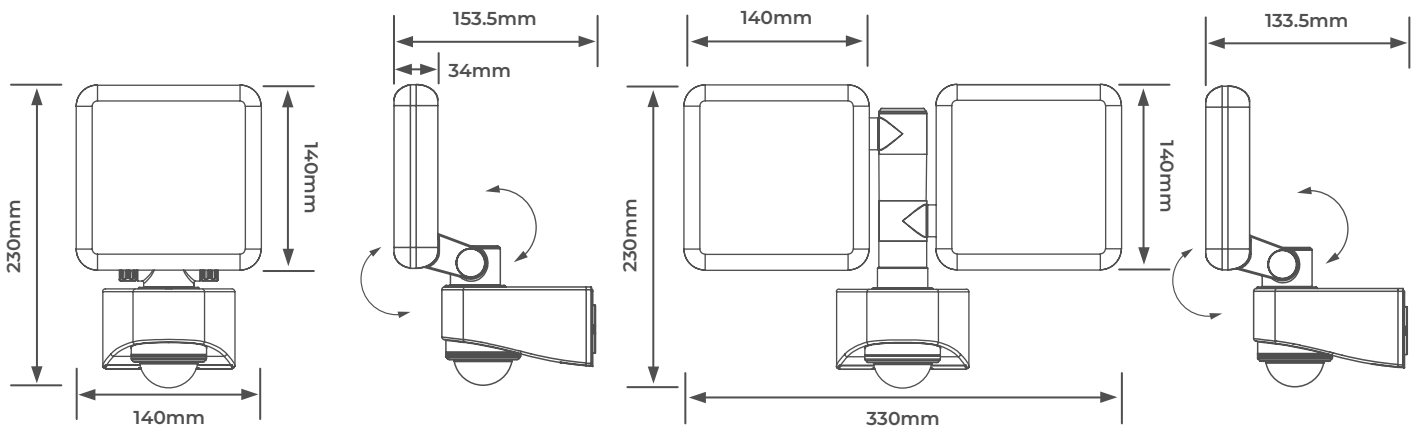

EWLS10B40P

EWLS20B40P

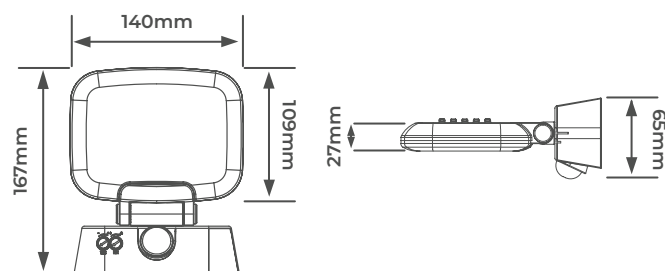

EWLS10B40MP

CAT NO.	WEIGHT (kg)	EFFICACY (Lm/W)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
EWLS10B40P	0.4	100	>80	50-60	IK05	-20 to +25	25	L70 / B50
EWLS20B40P	0.7	100	>80	50-60	IK05	-20 to +25	25	L70 / B50
EWLM10B40P	0.3	80	>80	50-60	IK05	-20 to +25	25	L70 / B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

LUCECO

This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

}

LED

The lamps cannot be changed in the luminaire.

874/2012

