



MENVIER



GSM Speech and Text Dialler **Menvier SD-GSM**

COOPER Safety

The SD-GSM offers an evolution in design of the industry leading speech dialler range from Menvier. Offering GSM communications, compatibility with the popular 'pay as you go' SIM card option and a host of features to make it easier to install and operate.

Easy to install

Even simpler to install the SIM card with the new board layout
Increased space within the same size housing to facilitate cable routing

Easy to programme

Lets the end user choose up to 10 contact telephone numbers and types of message (voice or SMS text), created to suit their requirements

Reliable

Tried and tested Menvier speech dialler technology built on 20 years experience

Remote access

Dial into the unit and access 4 programmable outputs that can remotely switch electrical apparatus or switch on indicators for a wide variety of technical information signals

Integral thermometer

Can be pre-set at any given temperature from 0°C to 40°C and the SD-GSM will transmit a message when the temperature has been exceeded or reached

Technical Specification

	Description
Supply voltage	10.5 - 28vDC
Current consumption (at 12vDC)	50mA (standby) 170mA (active)
Trigger inputs	8: positive/negative applied or positive/negative removed (5 - 24vDC)
Outputs	4 x open-collector (OC) switched -ve at 100mA
Dimensions (H X W X D)	140mm x115mm x 30mm
Operating environment	-10°C to 55°C
Sim card	Accepts any standard GSM/GPRS mobile telephone network SIM card

The unit enables you to enter up to ten contact telephone numbers, select the type of message (voice or SMS text) which should go to each and allows you to store spoken or text messages created to suit your specific requirements.


The programmable remote access feature lets you dial into the unit from anywhere in the world, and access four programmable outputs that can remotely switch electrical apparatus or switch on indicators.

An integral thermometer can be pre-set at any given temperature from 0°C - 40°C and will transmit a message when that temperature has been exceeded or reached.

The SD-GSM also has a unique feature, once an input has been activated, an automatic recorder will record either 15 or 30 seconds, via an in-built microphone, and store the recording. The recording can be accessed from anywhere in the world, using the remote access feature, or, at the premises, by using the message replay function on the keypad.

A huge range of applications:

- Ideal for remotely located boilers, freezers, vending machines, air conditioning unit, fire alarms, intruder alarm panels
- Boats, caravans, remote buildings, sport pavilions, modular buildings, trailers
- Monitoring temperature in animal enclosures

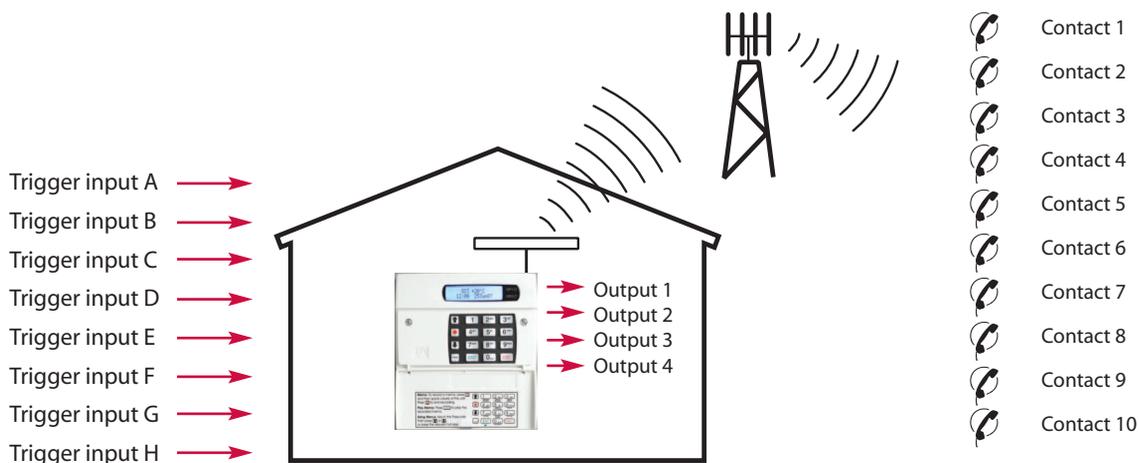

Installer Details :

**For information on your local stockist
contact our Marketing Department**

telephone: +44 (0)1594 541 979
 fax: +44 (0)1594 545 445
 email: marketing@coopersecurity.co.uk

MEN-002-0610

www.coopersecurity.co.uk

COOPER Safety

All Cooper logos are valuable trademarks of Cooper Industries in the U.S and other countries. You are not permitted to use Cooper trademarks without the prior consent of Cooper Industries.