



## Product Description

Creda TPRIIE features digital user controls, allowing the programming of 7-day timer profile via an icon-based display and capacitive buttons.


## Key Features

- Intuitive user controls with icon-based display
- User programmable room temperatures with multiple seven-day timer profiles
- Electronic thermostat accurate to within 0.2°C
- Energy-saving technologies such as Adaptive Start, Open Window Detection and Frost Protect
- Slimline design that covers traditional panel heater fixing marks
- Forward facing slotted grille
- Splash-proof for use in bathrooms
- Complies with Lot 20 of ERP Directive

## Technical Details

<b>Controls</b>	Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ ) <b>Timer modes:</b> 7 Day Programmable User Timer <b>Continuous heat modes:</b> Manual, Frost Protect, Off, Setback Mode
<b>Controller UI</b>	•Icon-based display with white backlight •Capacitive buttons with audio feedback •User replaceable battery (Coin-Type)
<b>Controller Functions</b>	•Open window detection, Adaptive-start, •Advance time period •Adjustable max SP range (7-32°C) •Bluetooth for software updates •Child Lock
<b>Construction</b>	•Durable epoxy-polyester powder coated steel casing with slotted forward facing grille •Advanced controls with cap-sense technology for total flexibility of heating
<b>Element</b>	Compact, finned, mineral filled sheathed element
<b>Installation</b>	1 H-frame wall bracket for easy fixing
<b>Safety</b>	•Thermal cut-out. Auto reset type •Overheat detection
<b>IP Rating</b>	IP24
<b>Battery Backup</b>	3.3V coin cell battery to backup real time clock. Battery life > 5 years.
<b>Supply</b>	1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240 V, 50Hz Class I, with earth wire
<b>Colour / Finish</b>	Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)

## Dimensions

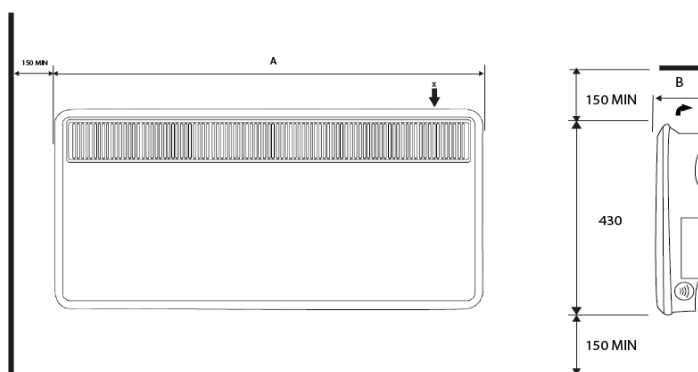

Model/Item No. (EAN-Code 5011139+Item No.)	090782	TPRII050E 090799	TPRII075E 091277	TPRII100E 090805	TPRII125E 090812	TPRII150E 090829	TPRII200E 090836	TPRII300E 090836
<b>Output (kW)</b>	0.50	0.75	1.00	1.25	1.50	2.00	3.00	3.00
<b>Height (mm)</b>	430	430	430	430	430	430	430	430
<b>Width A (mm)</b>	450	620	620	690	690	860	860	860
<b>Depth B (mm)</b>	108	108	108	108	108	108	143	143
<b>Weight (Kg)</b>	4.6	5.9	5.9	6.1	6.1	7.8	8.7	8.7

### Packaging Details

<b>Height (mm)</b>	470	470	470	470	470	470	470	470
<b>Width (mm)</b>	490	660	660	720	720	890	890	890
<b>Depth (mm)</b>	135	135	135	135	135	135	160	160
<b>Packed Weight (Kg)</b>	5.1	6.5	6.5	6.7	6.7	8.4	9.8	9.8
<b>Ti</b>	17	12	12	10	10	9	7	7
<b>Hi</b>	4	4	4	4	4	4	4	4
<b>Pallet Quantity (2.4m high)</b>	68	48	48	40	40	36	28	28

## Warranty & Approvals

<b>Approvals</b>	CE, BEAB
<b>Warranty</b>	1 Year
<b>Country of Origin</b>	United Kingdom
<b>Manufacturer</b>	Creda