SPECIFICATION SHEET

3 Compartment Cavity Floorbox

Model: TFB3/120

Tass Cable Management Ltd

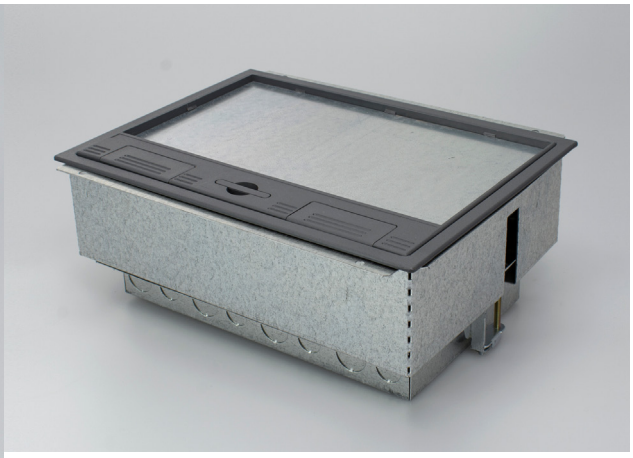

Product Description

- Floor box manufactured from galvanised steel
- 25 & 20mm knockouts to accept flexible conduit
- Frame & lid moulded from high impact polycarbonate (RAL7031)
- Galvanised lid insert for strength
- Easy grip recessed lifting handle
- Clamp fixing for fast installation
- Large range of accessory plate, colour equivalent: RAL7035
- Special plates available to order
- Standard depth 120mm designed to accepts standard accessory plates from electrical wholesalers
- Designed to accomodate power supplies and phone chargers
- Suitable for carpeted floors only with standard Frame & Lid
- Clean Earth Sockets available
- ABS Plastic Frame & Lid Load Test 550 KG
- Steel Frame & Lid Load Test 740 KG

Specifications

Floor Cut Out:	303mm x 221mm
Depth:	120mm
Plug Top Clearance:	70mm
Overall Frame & Lid:	313mm x 230mm
Frame Lid Recess:	6mm
Accessory Plates:	185mm x 89mm

Plug Top Clearance Diagram

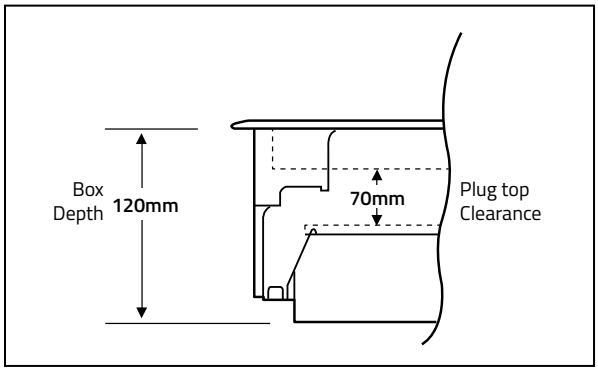

Frame & Lid Options for TFB3/120

Designed specifically for high traffic environments such as schools and colleges.

PCL12R281
12mm Recessed Powder Coated Steel

PCL20R281
20mm Recessed Powder Coated Steel

SSL12R281
12mm Recessed Stainless Steel

SSL20R281
20mm Recessed Stainless Steel

Contact: sales@floorbox.co.uk | **Visit:** www.floorbox.co.uk

Customer notice: Due to our policy of continuous improvement, Tass Cable Management Ltd reserve the right to change product specifications without notice. Tass Cable Management Ltd © | Floorbox.co.uk © | 2018 | All rights Reserved.